




EZ X LOADER

***Bishamon's New Economy
Automatic Pallet Positioner***

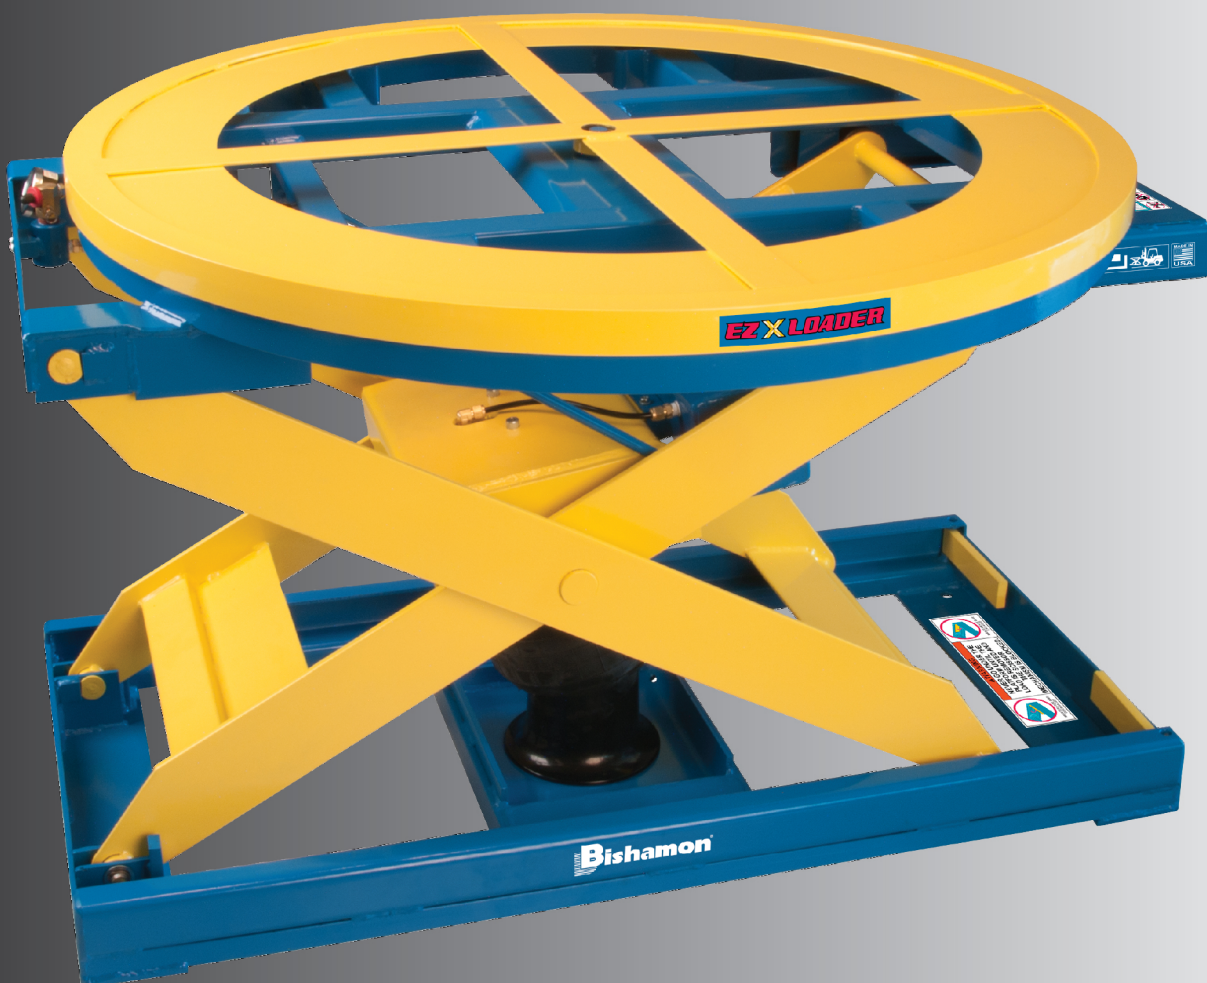

**Experience Industry's
"Best Engineered"
Ergonomic Equipment**

Learn More at: bishamon.com

Working Harder To Make Your Job Easier

EZ X LOADER



Standard Features

- Self leveling design automatically keeps the top of the load at a convenient working height
- Rotator ring with integral finger guard eliminates reaching and stretching
- Captive air operation eliminates mechanical springs
- Secured ball bearing center pivot of the 43" diameter rotator ring provides smooth, even rotation
- Pressure relief valve prevents excess pressure build-up
- Integral maintenance bars
- Surfaces are phosphatized and powder coated with a high quality polyester for a lasting, durable finish
- Rollers are entrapped in the base frame and platform for added stability
- EZ Loaders arrive at your facility fully assembled - just add air!
- Easily transported with a fork truck
- The EZ Loader is CE marked under the Machinery Directive (2006/42/EC)

Warranty:

Bishamon Industries Corporation warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at: 800-358-8833.



Manifold with Combo Tank Valve, Purge Valve and Pressure Gauge



Hinged Maintenance Bars




Pneumatic System Reservoir

DISTRIBUTED BY:



Terry Busing
Sales Partner | Indoff
p: 800-950-6438
p: 813-996-6443
f: 877-507-2119
e: terry@indoff-fl.com
www.indoff-fl.com

EZ X Loader Specifications

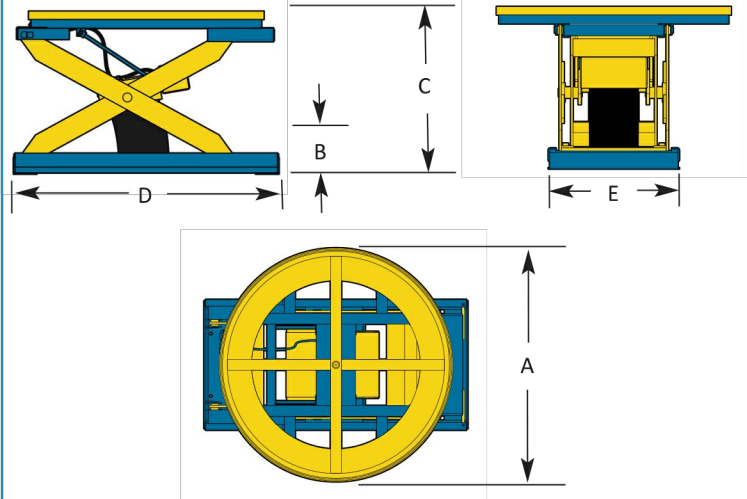

(A) Rotator Ring Diameter = 43.0 inches (1092 mm)

(B) Lowered Height = 9.8 inches (249 mm)

(C) Raised Height = 29.8 inches (757 mm)

(D) Base Frame Length = 48.5 inches (1232 mm)

(E) Base Frame Width = 24.0 inches (610 mm)

Minimum Self Leveling Capacity = 400 lbs (113 kgs)

Maximum Self Leveling Capacity = 2600 lbs (1588 kgs)

Maximum Load Capacity = 4000 lbs (1814 kgs)

Travel = 20.0 inches (508 mm)

EZ X Loader Accessories

EZ-ABS	Accordion bellows skirting with frame
EZ-SRT	Solid 43" diameter round top
EZ-4444	Oversize rectangular rotating platform (44"x44")
EZ-4448	Oversize rectangular rotating platform (44"x48")
EZ-4848	Oversize rectangular rotating platform (48"x48")

Bishamon
Bishamon Industries Corporation